



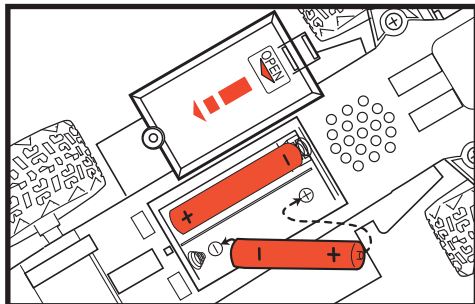

BATTERY INSTALLATIONS AND OPERATING INSTRUCTIONS

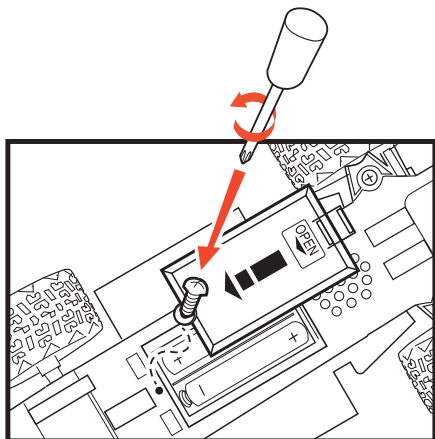

Product Features:

Touch Truck Cab roof to hear sound and light up headlight.

Battery Requirement: Included!

Truck Cab: 2 "AA" batteries.

Battery Installation:

1. Remove battery compartment covers by removing screw and pulling in the direction shown by the arrow (as shown above).
2. Insert 2 "AA" batteries. Be sure the positive "+" and negative "-" are properly matched.
3. Replace the Battery Compartment Cover and replace the screw.

For Best Results:

1. Do not mix old and new batteries.
2. Do not mix alkaline, standard or rechargeable batteries.
3. Use alkaline batteries only.

Contact New Bright Customer Service at
Toll Free
1-877-624-8697
M-F 8:00AM to 5:00PM Eastern Time


U.S. Toy Sales and Marketing Co. Inc.
30260 Oak Creek Drive – 2nd Floor Wixom MI 48393
1-877-624-8697
<http://www.newbright.com/>

New Bright

Trailer Operation



1. Lift to detach trailer hitch from semi mount slot.



2. Flip down trailer stand to support trailer while detached from semi.



3. Semi is now free to drive without the trailer.



4. Pull ramp away from trailer latch and let rest on ground.



5. Lower top deck to line-up with ramp.



6. Maneuver Freewheeling Trucks onto top deck.

(Limit 3 Freewheeling Trucks per trailer deck.)



7. Lift ramp and press firmly back into the latched position on trailer.



8. Reconnect trailer to semi by placing the trailer hitch into semi mount slot.



9. Flip up trailer stand into original lock position and semi can now haul Freewheeling Trucks



NEW BRIGHT