



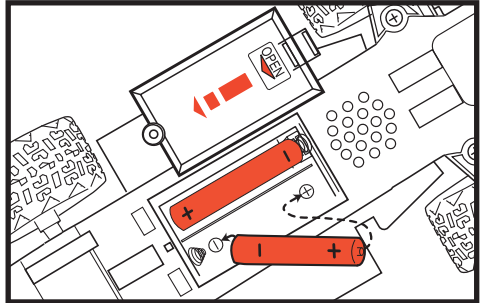

BATTERY INSTALLATIONS AND OPERATING INSTRUCTIONS

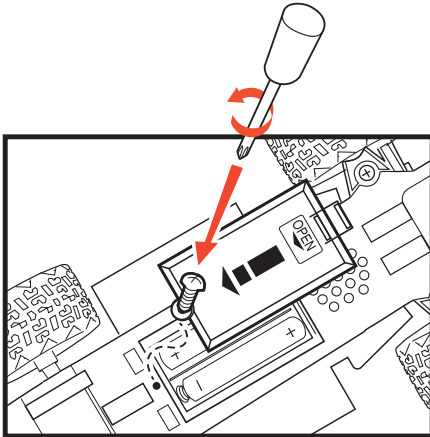

Product Features:

Touch Truck Cab roof to hear sound and light up headlight.

Battery Requirement: Included!

Truck Cab: 2 "AA" batteries.

Battery Installation:

1. Remove battery compartment covers by removing screw and pulling in the direction shown by the arrow (as shown above).
2. Insert 2 "AA" batteries. Be sure the positive "+" and negative "-" are properly matched.
3. Replace the Battery Compartment Cover and replace the screw.

For Best Results:

1. Do not mix old and new batteries.
2. Do not mix alkaline, standard or rechargeable batteries.
3. Use alkaline batteries only.

Contact New Bright Customer Service at
Toll Free
1-877-624-8697
M-F 8:00AM to 5:00PM Eastern Time

U.S. Toy Sales and Marketing Co. Inc.
30260 Oak Creek Drive – 2nd Floor Wixom MI 48393
1-877-624-8697
<http://www.newbright.com/>